


MEDIUM DUTY 37 SERIES




MAXIMUM CAPACITY

750 lbs.

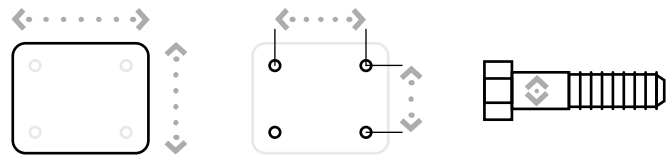

Top Plate Size	Bolt Hole Spacing	Bolt Diameter
Standard: 4" x 4.5"	2.625" x 3.625" Slotted to 3" x 3"	0.375"

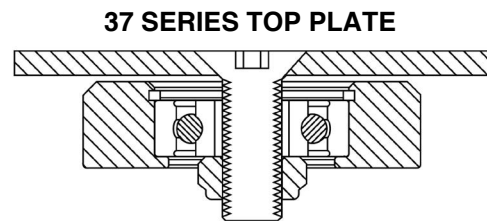

FEATURES

Swivel Section: Sealed precision ball bearing with hardened raceways and neoprene seals.

Legs: 1/4" x 1.5" steel, formed and continuously welded on the inside and outside to the yoke base.

Wheels: 4" to 8" diameter wheels are available with sealed precision ball bearings.

Axle: 1/2" diameter.

Finish: Clear zinc plating.

APPLICATIONS

Excellent for daughter carts in mother/daughter type production cart systems, production racks and fixtures, parts bins, manual push carts, conveyor systems, and other applications where maintenance-free casters and ergonomics are concerns.

BENEFITS

The 37 Series is maintenance free with its sealed precision ball bearings in the swivel section and in the wheels. The smooth rotation and extended lead lowers ergonomic forces.

OPTIONS

BRAKES

Poly Lock: P*
Face Contact: F

SWIVEL LOCKS

Factory Installed: L
Demountable: DL
Foot Actuated: KL

TOE GUARD: TG

* For wheels with a diameter > 6"

MEDIUM DUTY 37 SERIES

PRECISION BALL BEARING

Diameter	Width	Material	Capacity	OAH	Swivel Radius	Swivel Lead	Part Number	Weight
4	2.00	Phenolic	750	5.63	4.61	2.50	37-04204-30-1*	5.41
4	2.00	T/R Polyurethane	600	5.63	4.61	2.50	37-04204-61-1*	7.35
4	2.00	T/R-95 Polyurethane	750	5.63	4.61	2.50	37-04204-91-1*	7.35
4	2.00	ErgoTread	750	5.63	4.61	2.50	37-04202-40-1	7.35
4	2.00	ErgoTread	750	5.63	4.61	2.50	37-04202-42-1	7.35
4	2.00	T/R Polyurethane	600	5.63	4.61	2.50	37-04202-93-1	7.35
4	2.00	T/R-95 Polyurethane	750	5.63	4.61	2.50	37-04202-94-1	7.35
4	2.00	ErgoTread	570	5.63	4.61	2.50	37-04202-44-1	7.35
5	2.00	Phenolic	750	6.50	5.10	2.50	37-05204-30-1*	6.37
5	2.00	T/R Polyurethane	750	6.50	5.10	2.50	37-05202-61-1	9.83
5	2.00	T/R-95 Polyurethane	750	6.50	5.10	2.50	37-05202-91-1	9.83
5	2.00	ErgoTread	750	6.50	5.10	2.50	37-05202-40-1	9.83
5	2.00	T/R Polyurethane	750	6.50	5.10	2.50	37-05202-93-1	9.83
5	2.00	T/R-95 Polyurethane	750	6.50	5.10	2.50	37-05202-94-1	9.83
5	2.00	ErgoTread	750	6.50	5.10	2.50	37-05202-44-1	9.83
6	2.00	Phenolic	750	7.50	5.59	2.50	37-06204-30-1*	7.19
6	2.00	T/R Polyurethane	750	7.50	5.59	2.50	37-06202-61-1	10.44
6	2.00	T/R-95 Polyurethane	750	7.50	5.59	2.50	37-06202-91-1	10.44
6	2.00	ErgoTread	750	7.50	5.59	2.50	37-06202-40-1	10.44
6	2.00	T/R Polyurethane	750	7.50	5.59	2.50	37-06202-93-1	10.44
6	2.00	T/R-95 Polyurethane	750	7.50	5.59	2.50	37-06202-94-1	10.44
6	2.00	ErgoTread	750	7.50	5.59	2.50	37-06202-44-1	10.44
8	2.00	Phenolic	750	10.12	6.58	2.50	37-08204-30-1*	8.83
8	2.00	T/R Polyurethane	750	10.12	6.58	2.50	37-08202-61-1	13.46
8	2.00	T/R-95 Polyurethane	750	10.12	6.58	2.50	37-08202-91-1	13.46
8	2.00	ErgoTread	750	10.12	6.58	2.50	37-08202-40-1	13.46
8	2.00	T/R Polyurethane	750	10.12	6.58	2.50	37-08202-93-1	13.46
8	2.00	T/R-95 Polyurethane	750	10.12	6.58	2.50	37-08202-94-1	13.46
8	2.00	ErgoTread	750	10.12	6.58	2.50	37-08202-44-1	13.46

Capacity listed is for manual operation. For powered operations, consult factory.

Part Numbers listed are for the swivel casters. For rigid casters, change the last digit from 1 to 2 (i.e. 37-08202-61-2)

Estimated weight is for swivel caster. Deduct 20 percent of swivel caster weight for rigid casters.

* This caster has annular ball bearings

All dimensions are in inches. All weights are in pounds.