

Ball Metal Tread



Features

- Industry leading selection and overall value
- Fast deliveries for any order quantity
- · Self-lubricating acetyl resin bearing
- No exposed axle

Applications


- Store Fixtures
- Furniture
- Office Equipment
- Medical Equipment

Options

- Brake 2-1/2" diameter models.
- Tred-Gard® cover protects tread from scratches during manufacturing and shipping. To order add [-T] to end of Part Number. Available for 2" and 2-1/2" models. For field installable Tred-Gards order 001391 for 2" and 001550 for 2-1/2" models.

Wheel Diameter (Inches)	Mounting Height (Inches)	Swivel Radius (Inches)	Finish Type	Dynamic Load (Pounds)	Base Model # (Add fastening code)	Brake Model # (Add fastening code)	Fastening Selection*	
1-1/2" Starlet	Thread/Plate: 1-13/16" Grip Ring/Grip Neck: 1-5/8"	1-3/16"	Bright Brass	40	PST15BB		Threaded: 525 Grip Neck: 302	
			Bright Chrome	40	PST15BC			
			Windsor Antique	40	PST15WA		Plate: 1R	
2" Satellite	Thread: 2-5/16" Grip Ring/Grip Neck: 2-3/16" Plate: 2-1/2"	1-1/2"	Bright Brass	75	PSE20BB		Threaded: 507, 525, 605,	
			Bright Chrome	75	PSE20BC		637, 639, 828 Grip Neck: 302	
			Satin Chrome	75	PSE20SC		Grip Ring: 211, 222, 223	
			Windsor Antique	75	PSE20WA		Plate: 101, 113	
2-1/2" Planet	Thread: 2-13/16" Grip Ring/Grip Neck: 2-11/16"	1-7/8" Brake: 2-5/16"	Bright Brass	100	PPL25BB	PPL25BB-B	545, 605, 637, 639 Grip Neck: 302	
			Bright Chrome	100	PPL25BC	PPL25BC-B		
			Satin Chrome	100	PPL25SC	PPL25SC-B		
	Plate: 3"		Windsor Antique	100	PPL25WA	PPL25WA-B	Plate: 101, 113	
*To order, i Threade	nclude blue fastener co d Stem	de in Base M	l odel Number . Exar	nple: PST15	60 <u>525</u> BB			
828 -	<u> </u>	545 ——	507 52	6 —— (512 — 6	39 — 637 -	605	



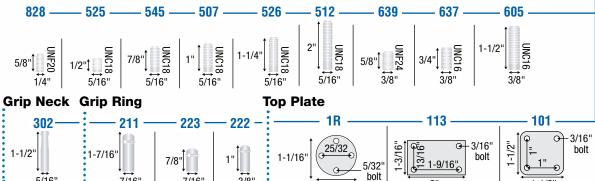



5/16"

:

i

24





7/16"

7/16"



3/8"



1-1/16"

2"

Note: Unfinished models available Socket Options

1-1/2'

Shepherd has many solutions to help you mount your casters to your equipment quickly and easily. See pages 56-57 for more information.



www.shepherdcasters.com

Features

- Industry leading selection and overall value
- · Fast deliveries for any order quantity
- Self-lubricating acetyl resin bearing
- · No exposed axle
- · Rubber tread; Urethane for
- 1-9/16" diameter models

Applications

Store Fixtures

• Office Equipment

Medical Equipment

• Furniture

Options


- Brake: 3" diameter models only.
- Unfinished available
- Locking Pin: Available on 3" non-brake unfinished models. To order change "PSN" to "PNL" in Model Number.



V




Wheel Diameter (Inches)	Mounting Height (Inches)	Swivel Radius (Inches)	Finish Type	Dynamic Load (Pounds)	(Add fastening	Brake Model # (Add fastening code)	Fastening Selection*	1
1-9/16" Cosmo	Thread/Plate: 1-13/16" Grip Ring/Grip Neck: 1-11/16"	1-1/16"	Bright Brass	40	PCM40BB		Threaded: 525 Grip Neck: 302 Plate: 1R	
2-1/4" Nova	Threaded: 2-7/16" Grip Ring/Grip Neck: 2-5/16" Plate: 2-5/8"	1-9/16"	Bright Brass Bright Chrome Satin Chrome Windsor Antique Unfinished	75 75 75 75 75 75	PNA22BB PNA22BC PNA22SC PNA22WA PNA22UF		Threaded: 507, 525, 605, 637, 639, 828 Grip Neck: 302 Grip Ring: 211, 222, 223 Plate: 101, 113	
3" Saturn	Thread: 3" Grip Ring/Grip Neck: 2-7/8" Plate: 3-3/16"	2-1/16" Brake: 2-5/16 "	Bright Brass Bright Chrome Satin Chrome Windsor Antique Unfinished	100 100 100 100 100	PSN30BB PSN30BC PSN30SC PSN30WA PSN30UF	PSN30BB-B PSN30BC-B PSN30SC-B PSN30WA-B PSN30UF-B	Threaded: 512, 525, 526, 545, 605, 637, 639 Grip Neck: 302 Grip Ring: 211, 222, 223 Plate: 101, 113	



7/8"


7/16'

3/8'

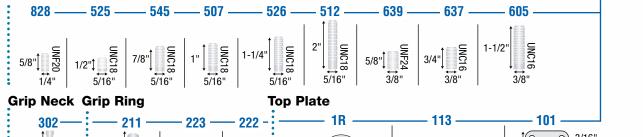

Bright Chrome

1"



Bright Brass



Windsor Antique



Note: Unfinished models available

Satin Chrome





Shepherd has many solutions to help you mount your casters to your equipment quickly and easily. See pages

1-7/16"

7/16"

1-1/2

5/16"

Socket Options

i

